

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
25 March 2004 (25.03.2004)

PCT

(10) International Publication Number
WO 2004/025688 A2

(51) International Patent Classification⁷: **H01J 61/12**,
61/42, 61/30, 61/54, 61/067

MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, SZ, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW only: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(21) International Application Number:
PCT/IB2003/003982

(22) International Filing Date:
1 September 2003 (01.09.2003)

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): SCHOLL, Robert, Peter [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weiss hausstr. 2, 52066 Aachen (DE). HILBIG, Rainer [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weiss hausstr. 2, 52066 Aachen (DE). KOERBER, Achim, Gerhard, Rolf [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weiss hausstr. 2, 52066 Aachen (DE). BAIER, Johannes [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weiss hausstr. 2, 52066 Aachen (DE).

(25) Filing Language: English

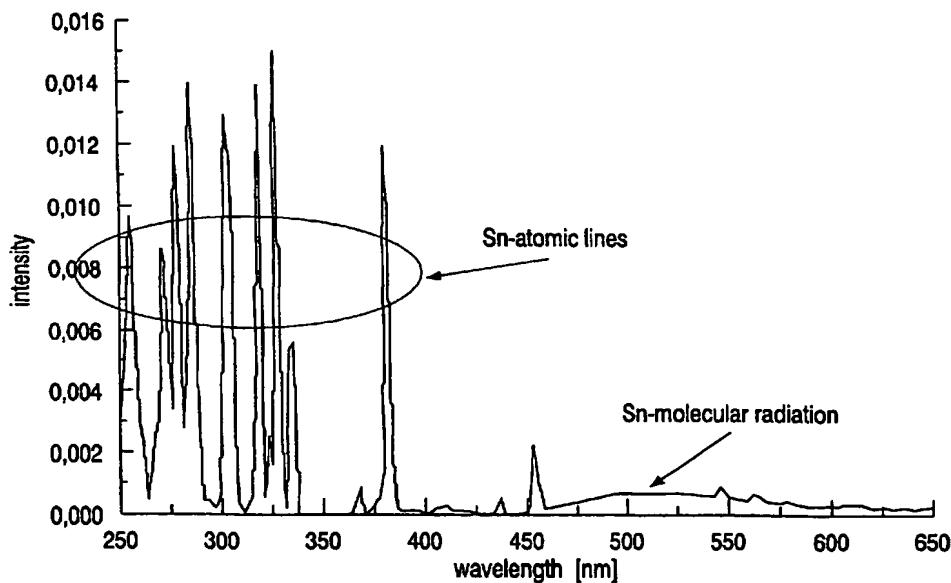
(74) Agent: MEYER, Michael; Philips Intellectual Property & Standards GmbH, Weiss hausstr. 2, 52066 Aachen (DE).

(26) Publication Language: English

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CY, CZ, DK, DM, DZ, EC, EE, ES, FI, FR, GB, GD, GE, GH, GM, GR, HR, HU, ID, IE, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,

[Continued on next page]

(54) Title: LOW-PRESSURE GAS DISCHARGE LAMP WITH GAS FILLING CONTAINING TIN

SnBr₂

WO 2004/025688 A2

(57) Abstract: A low-pressure gas discharge lamp equipped with a gas discharge vessel containing an inert gas filling as the buffer gas, and with electrodes and with means for generating and maintaining a low-pressure gas discharge, is described, wherein the lamp contains at least one tin halide.